
Model: PARK LINEAL ACERO 33,3X100(A)
Codes: 100291830
Water absorption: BIII - Cladding Tile (10.0% < wa <= 20.0%)
Finish: Glazed / Standard
Tone variations: V3
Rectified: Yes

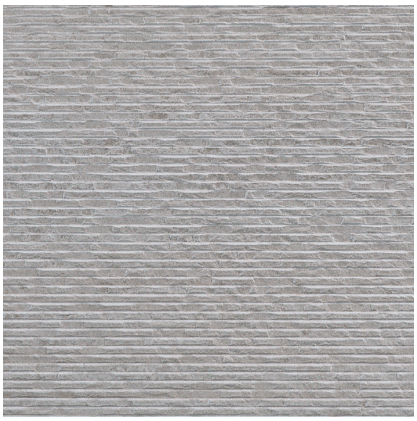

Sistema DAPc® Declaración Ambiental de Productos de Construcción

## DIMENSIONAL FEATURES
UNE-EN ISO 10545-2

| | | |
|---|---|---|
| Thickness | 9.3 mm | +/-5%* |
| Width | 332.8 mm | |
| Length | 1000 mm | |
| Length and width deviation | Below 0.15% | +/-0.3%* |
| Side straightness deviation | Below 0.15% | +/-0.3%* |
| Squareness deviation | Below 0.15% | +/-0.3%* |
| Surface flatness deviation | Below 0.15% | +/-0.4%* |

*ISO-13006:2018 UNE-EN 14411:2016

## FEATURES

- Natural-looking, non-glossy surface finish.
- General deshaded design with a degree of color and appearance variation.
- Moderate variation. The color intensity of each piece may vary significantly, although the colors present in one tile will be representative of the colors to be expected in the rest of the tiles
- Name given to the finish of those tiles dimensionally improved after the firing process.
- Finish with clearly defined protrusions that give the surface a feeling of volume.
- Wall installation

## MECHANICAL FEATURES
UNE-EN ISO 10545-4-6-7-9-11

| | | |
|---|---|---|
| Breaking strength | >1100 | >600 N* |
| Modulus of rupture | >23 N/mm2 | >=12 N/mm2* |
| Crazing resistance | PASS | |

*ISO-13006:2018 UNE-EN 14411:2016

## HYGIENIC FEATURES
UNE-EN ISO 10545-13-14

| | | |
|---|---|---|
| Chemical resistance | Class "A" for swimming pools and cleaning products (resists attack). Minimum Class "B" for acids and bases | B Min.* |
| Stain resistance | Class 5. Easy cleaning with water | 3 Min.* |

*ISO-13006:2018 UNE-EN 14411:2016

## PACKING

| | | |
|---|---|---|
| Sales units per box | 1.665002 M2/BOX | |
| Sales units per pallet | 73.260073 M2/PAL | |
| Sales units per unit | 0.333 M2/PIECE | |

System Certification

Do not use cleaning agents containing hydrofluoric acid.
It is recommended to fix tiles with a minimum joint of 1,5 mm. Do not fix without joint.
For big sizes, it is recomended to fix with mortars containing polymeric additives and to use the double glueing technique.
Mosaic tiles must be grouted.
This document is only commercial and cannot be used as expert opinion, documentary evidence or in any legal or administrative procedure unless authorized by PORCELANOSA S.A.

## SCOPE OF USE

| | | |
|---|---|---|
| Technical code-1 | 1 - Use on walls | |

System Certification

Do not use cleaning agents containing hydrofluoric acid.
It is recommended to fix tiles with a minimum joint of 1,5 mm. Do not fix without joint.
For big sizes, it is recomended to fix with mortars containing polymeric additives and to use the double glueing technique.
Mosaic tiles must be grouted.
This document is only commercial and cannot be used as expert opinion, documentary evidence or in any legal or administrative procedure unless authorized by PORCELANOSA S.A.