
Model: CARRARA BLANCO NATURAL L 59,6X59,6(A)
Codes: 100325566
Water absorption: BIa - Porcelain tile (wa <= 0.1%)
Finish: Glazed / Standard
Tone variations: V2
Rectified: Yes

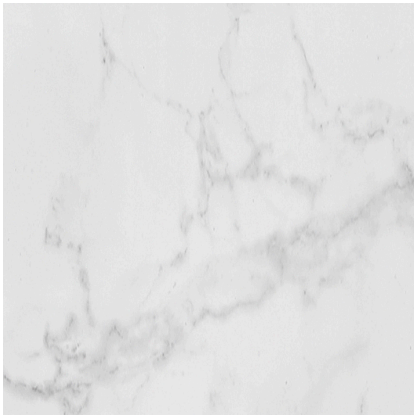

Sistema DAPc® Declaración Ambiental de Productos de Construcción

QB UPEC

## DIMENSIONAL FEATURES
UNE-EN ISO 10545-2

| | | |
|---|---|---|
| Thickness | 8.5 mm | +/-5%* |
| Width | 596 mm | |
| Length | 596 mm | |
| Length and width deviation | Below 0.15% | +/-0.3%* |
| Side straightness deviation | Below 0.15% | +/-0.3%* |
| Squareness deviation | Below 0.15% | +/-0.3%* |
| Surface flatness deviation | Below 0.15% | +/-0.4%* |

*ISO-13006:2018 UNE-EN 14411:2016

## FEATURES

Natural-looking, non-glossy surface finish.

Name given to the finish of those tiles dimensionally improved after the firing process.

U3

U3

Installation on floor

## MECHANICAL FEATURES
UNE-EN ISO 10545-4-6-7-9-11

| | | |
|---|---|---|
| Breaking strength | 2536.4 N | >1300 N* |
| Modulus of rupture | 50.4 N/mm2 | >=35 N/mm2* |
| Abrasion resistance | 4 | |
| Crazing resistance | PASS | |
| Qb-upec (u) | 3 | |
| Qb-upec (p) | 3 | |
| Qb-upec (e) | 3 | |
| Qb-upec (c) | 2 | |
| Resistance to thermal shock | RESISTE | UNE-EN ISO 10545-9:2013* |

*ISO-13006:2018 UNE-EN 14411:2016

## HYGIENIC FEATURES
UNE-EN ISO 10545-13-14

| | | |
|---|---|---|
| Chemical resistance | Class "A" for swimming pools and cleaning products (resists attack). Minimum Class "B" for acids and bases | B Min.* |
| Stain resistance | Class 5. Easy cleaning with water | 3 Min.* |

*ISO-13006:2018 UNE-EN 14411:2016

System Certification

Do not use cleaning agents containing hydrofluoric acid.
It is recommended to fix tiles with a minimum joint of 1,5 mm. Do not fix without joint.
For big sizes, it is recomended to fix with mortars containing polymeric additives and to use the double glueing technique.
Mosaic tiles must be grouted.
This document is only commercial and cannot be used as expert opinion, documentary evidence or in any legal or administrative procedure unless authorized by PORCELANOSA S.A.

## ANTI-SLIP VALUE

Reference standards: EN 16165 (Annex A, B, C) - ANSI A326.3 - AS 4586

| | | |
|---|---|---|
| Dynamic coefficient of friction (dcof) | 0.60 (T12C2) | |
| Slip resistance (wet pendulum) irhd 55 | CL0 | UNE-EN 16165:2022 Anexo C* |
| Slip resistance (shod feet) | <R-9 | TONO 4 / ID 2419* |
| Pendulum test value (ptv) irhd 96 | WET 26/DRY 59 (T12C2) | BS EN 16165 Anexo C* |
| Slip resistance (wet pendulum) (aus) irhd 55 | P1 | AS 4586* |
| Slip resistance (wet pendulum) (aus) irhd 96 | P2 | AS 4586* |

*ISO-13006:2018 UNE 14411:2016 ANSI 137.1 AS 4662

## DETERMINATION OF LIGHT REFLECTANCE VALUE (LRV)

UNE-EN ISO 10545-18

| | | |
|---|---|---|
| Determination of light reflectance value (lrv) | 60.04 | |

*ISO-13006:2018 UNE-EN 14411:2016

## PACKING

| | | |
|---|---|---|
| Sales units per box | 1.776073 M2/BOX | |
| Sales units per pallet | 56.834328 M2/PAL | |
| Sales units per unit | 0.355215 M2/PIECE | |

## SCOPE OF USE

| | | |
|---|---|---|
| Technical code-1 | 6 - Use on heavy traffic floors | |

## RECOMMENDED USE LOCATIONS

**Single-family dwelling**

Indoor Premises - Dry: Room, room, bedroom or other enclosure without direct access to the outdoors.

**Collective housing**

Indoor Premises - Residential - Dry: Entrance, living room, dining room, professional office with reception of customers

Indoor Premises - Housing - Dry: Bedrooms, personal office, storage room, changing room

**Various**

Cladding of bonded or mixed facades

Facade cladding with mechanical anchors

Kitchen worktops, bars, restaurants

Public bathroom countertops

System Certification

Do not use cleaning agents containing hydrofluoric acid.
It is recommended to fix tiles with a minimum joint of 1,5 mm. Do not fix without joint.
For big sizes, it is recomended to fix with mortars containing polymeric additives and to use the double glueing technique.
Mosaic tiles must be grouted.
This document is only commercial and cannot be used as expert opinion, documentary evidence or in any legal or administrative procedure unless authorized by PORCELANOSA S.A.